

## PROLINE® ULTRA-LOW NO<sub>x</sub> COMMERCIAL-GRADE RESIDENTIAL

### INTELLIGENT CONTROL LOGIC

- The internal microprocessor provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performance.
- Uses a thermopile to generate the power needed to operate the electronic gas control without requiring an external power source
- The electronic gas control incorporates an LED status indicator that monitors system operation & service diagnostics.

### HIGH UNIFORM ENERGY FACTOR (UEF)

- Eco-friendly non-CFC foam insulation, heat traps and specially designed combustion chamber combine to produce a high UEF for maximum savings on operating costs.

### GREEN CHOICE® GAS BURNER

- Enhanced Ultra-low NO<sub>x</sub> burner complies with SCAQMD Rule 1121 and other air quality management districts with similar requirements for NO<sub>x</sub> emissions of less than 10 ng/J.

### DYNACLEAN™ DIFFUSER DIP TUBE

- Helps reduce lime and sediment buildup and maximizes hot water output. Made from long-lasting PEX cross-linked polymer.

### COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.

### PUSH-BUTTON PIEZO IGNITOR

- Makes lighting the pilot fast and easy with one-hand push-button spark ignition.

### HEAT TRAP NIPPLES

- Factory-installed for faster installation

### BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.

### ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a ¼ turn (open/close) radius, which not only permits full straight-through water flow but also a quick and positive shut off.

### CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes.
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1.
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy Conservation Act (EPCA), as amended.

### CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

- Top-mounted T&P relief valve available as option.

### DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 PSI test pressure and 150 PSI working pressure. Listed according to ANSI Z21.10.1-CSA 4.1 standards governing storage tank-type gas water heaters.

### 6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to [hotwater.com](http://hotwater.com).



Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	BTU Input Natural Gas	Recovery @ 90°F Rise Gallon Per Hour	Dimensions in Inches									Approx. Shipping Weight (lbs)
							A	B	C	D	E	F	G*	H*	Draft Hood	
<b>Tall Models</b>																
GUC-30	30	29	62	0.59	33,000	34	61-3/4	58	16	12	8	51-3/4	N/A	N/A	3 or 4	126
GUC-40	40	38	83	0.64	40,000	41	62	58-1/4	18	12	8	52	N/A	N/A	3 or 4	125
GUR-40	40	38	83	0.64	40,000	41	62	58-1/4	20	12	8	52	N/A	N/A	3 or 4	125
GUC-50	50	48	84	0.61	40,000	42	60-3/4	57-1/4	20	12	8	50-1/2	N/A	N/A	3 or 4	148
GUR-50	50	48	84	0.64	40,000	42	60-3/4	57-1/4	22	12	8	50-1/2	N/A	N/A	3 or 4	148
GURT-50L*	50	48	91	0.60	50,000	51	61	57-1/2	22	12-1/4	8	50-1/2	12-1/4	50-1/2	4	177
<b>Short Models</b>																
GURL-40	40	38	72	0.57	40,000	41	51-1/2	47-3/4	22	12	8	41-1/4	N/A	N/A	3 or 4	138


All models may be ordered from the factory with top T&P.

\*Standard with side recirculating taps (model GURT-50L).

Most models approved for installation from sea level to 7,700 ft. elevation (except on GURT-50L which is approved to 5,400 ft.).

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

For 10-year tank and 10-year parts warranty, change "G" to "X" in model number.

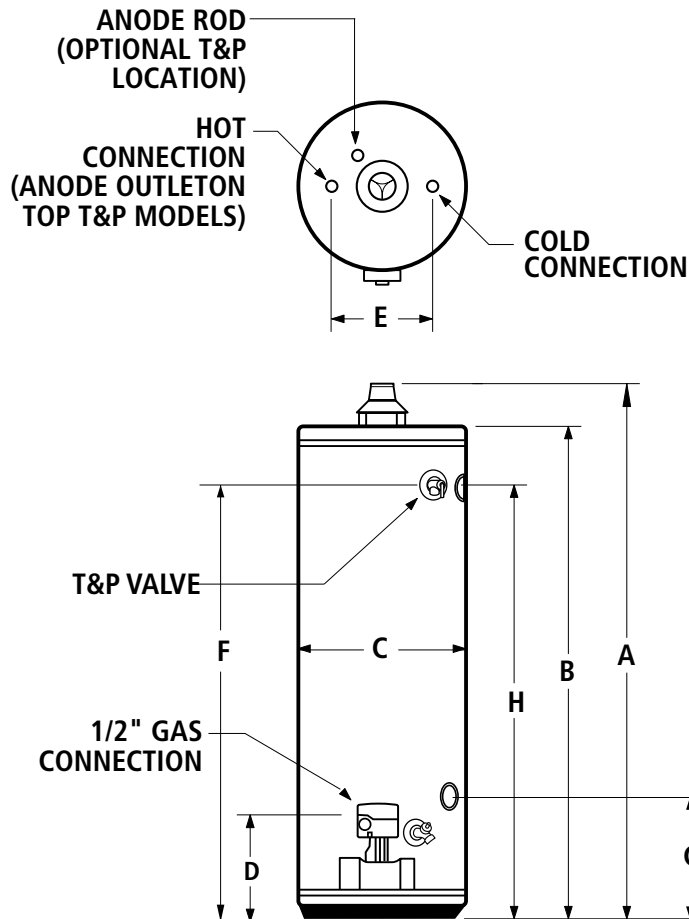

**Maximum Hydrostatic Working Pressure: 150 PSI**

For technical information call 800-527-1953. A. O. Smith Corporation reserves the right to make product changes or improvements without prior notice.